



MAINTAINED FOOTCANDE VALUES AT GRADE,
USING A .72 MAINTENANCE FACTOR.

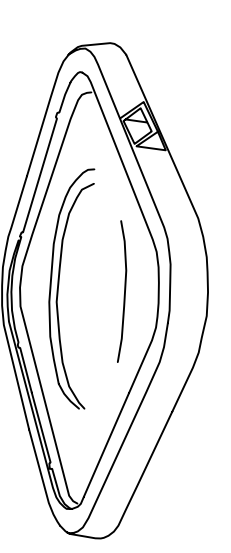

**FLAT LENS
ENCORE**

NOTE: ENCORE SERIES REQUIRES 16" DECK PAN

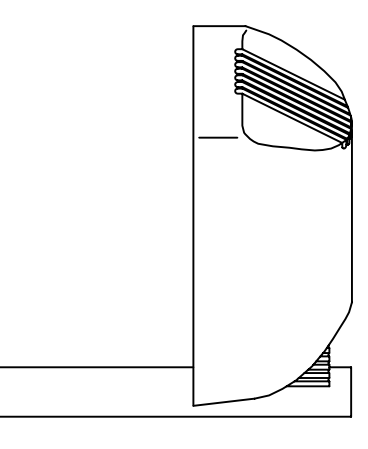

CHALLENGER

Statistical Area Summary					
Label	Avg	Max	Min	Avg/Min	Max/Min
CORER AREA	12.19	95.7	0.1	121.90	587.00
TRUCK AREA	14.52	47.2	0.2	72.60	236.00
COMMERCIAL AREA					

Luminaire Schedule					
Symbol	Qty	Label	Arrangement	Lumens	LF
■	20	A	SINGLE	10780	0.750
■	9	B	4 @ 90 DEGREES	10780	0.720
■	4	C	4 @ 90 DEGREES	10780	0.720
■	6	D	D180	10780	0.720

Rev.	Date	By

Based on the information provided, all dimensions and luminaire locations shown represent recommended positions. The engineer and/or architect must determine applicability of the layout to existing or future field conditions.

This lighting pattern represents illumination levels calculated from laboratory data taken under controlled conditions using current industry standard lamp ratings in open air. Performance of any manufacturer's luminaire may vary due to variation in electrical voltage, tolerance in lamps and other variable field conditions.

INDUSTRIES
PERRIS ARCO TRAVEL ZONE
PERRIS, CA

SCALE: 1"=60'
DATE: 7-26-04
SHEET 1 OF 1